



HB17 with the
HB172DK



HB172DK

This sluice is the third tray for the HB17D2K above. If you own the HB17 Highbanker and wish to purchase the \$400 Dredge Kit, you would only have to pay the remaining \$270

P.O. Box 1139
615 Cass St. Owosso, MI 48867
www.honcoophighbaker.com

Toll Free Phone: 1-888-988-2122
Phone: 1-989-723-3404
Email: Honcoopgold@earthlink.net



**THE
HONCOOP Highbanker
COMPANY**

Products for the gold mining enthusiast.




SS10 Stream Sluice Assembly & Use Instructions

P.O. Box 1139
615 Cass St. Owosso, MI 48867
www.honcoophighbaker.com

This sluice came about through my desire to have a way to clean up just the top portion for a quicky cleanup. I didn't want to have to remove the whole tray just to see how I was doing. I also wanted Moss and Black Ribbed Mat the whole length for better recovery and easier cleanup. I believe I achieved my goal.

Enjoy!

-Donald Honcoop

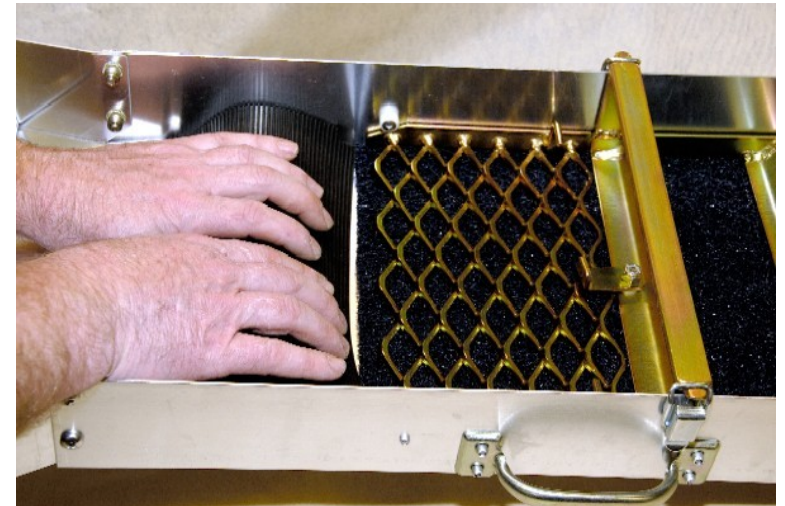


To reassemble, set the Mat, moss, and expanded metal back into the sluice first. Then, finish with the front Black Ribbed Mat by bowing it up to fit the rubber mat on top of the Moss, but under the expanded metal.

1-888-988-2122



Clean up the two pieces of Ribbed Mat and the one piece of Moss directly in your pan.

HONCOOP HIGHBANKER

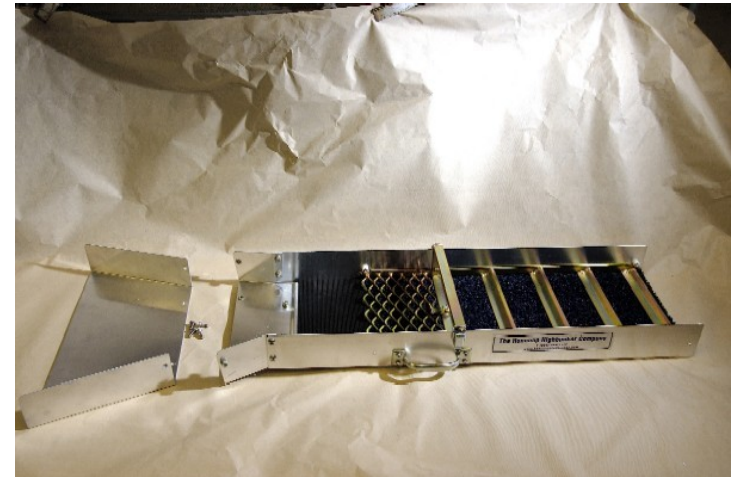

This sluice has a two part flume. The two different lengths give you more options when working in slow or fast moving water. 6 stainless steel screws attach the small flume, 4 screws for the addition of the large. A Phillips screwdriver is required.


Angle of use is set up by using the slope of the flume coming off the tray. When the flume is in the water it should be more or less level.

1-888-988-2122



Swing the expanded metal hold-down lever left or right to start a quick cleanup. The latches do not have to be released on the main tray for the quick cleanup.

HONCOOP Highbanker

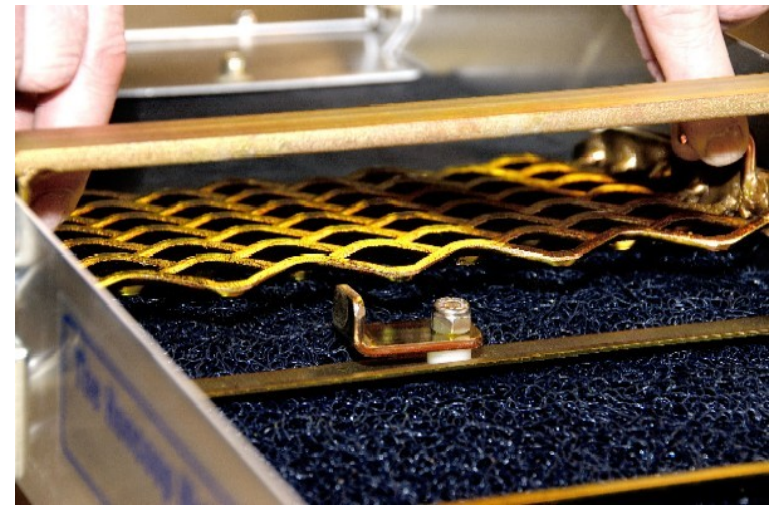

Pull up on the two tabs to remove the expanded metal.